

Please type a plus sign (+) inside this box → ☒

PTO/SB/05 (4/98)
Approved for use through 09/30/2000. OMB 0651-0032
Patent and Trademark Office: U.S. DEPARTMENT OF COMMERCE

Under the Paperwork Reduction Act of 1995, no persons are required to respond to a collection of information unless it displays a valid OMB control number.

UTILITY PATENT APPLICATION TRANSMITTAL <i>(Only for new nonprovisional applications under 37 C.F.R. § 1.53(b))</i>	Attorney Docket No. CAR-99-006
	First Inventor or Application Identifier David Liu et al.
	Title Network Apparatuses, Networks, Computer Program Product
	Express Mail Label No. EE424539731US

APPLICATION ELEMENTS <i>See MPEP chapter 600 concerning utility patent application contents.</i>	ADDRESS TO: Assistant Commissioner for Patents Box Patent Application Washington, DC 20231
1. <input checked="" type="checkbox"/> * Fee Transmittal Form (e.g., PTO/SB/17) <i>(Submit an original and a duplicate for fee processing)</i> 2. 29 Specification [Total Pages 29] <i>(preferred arrangement set forth below)</i> - Descriptive title of the invention - Cross References to Related Applications - Statement Regarding Fed sponsored R & D - Reference to Microfiche Appendix - Background of the invention - Brief Summary of the invention - Brief Description of the Drawings (if filed) - Detailed Description - Claim(s) - Abstract of the Disclosure 3. 3 Drawing(s) (35 U.S.C. 113) [Total Sheets 3] 4. Oath or Declaration [Total Pages 32] a. <input checked="" type="checkbox"/> Newly executed (original or copy) b. <input type="checkbox"/> Copy from a prior application (37 C.F.R. § 1.63(d)) <i>(for continuation/divisional with Box 16 completed)</i> i. <input type="checkbox"/> DELETION OF INVENTOR(S) Signed statement attached deleting inventor(s) named in the prior application, see 37 C.F.R. §§ 1.63(d)(2) and 1.33(b).	5. <input type="checkbox"/> Microfiche Computer Program (Appendix) 6. Nucleotide and/or Amino Acid Sequence Submission (if applicable, all necessary) a. <input type="checkbox"/> Computer Readable Copy b. <input type="checkbox"/> Paper Copy (identical to computer copy) c. <input type="checkbox"/> Statement verifying identity of above copies
ACCOMPANYING APPLICATION PARTS 7. <input checked="" type="checkbox"/> Assignment Papers (cover sheet & document(s)) 8. <input checked="" type="checkbox"/> 37 C.F.R. § 3.73(b) Statement <input checked="" type="checkbox"/> Power of Attorney <i>(when there is an assignee)</i> 9. <input type="checkbox"/> English Translation Document (if applicable) 10. <input type="checkbox"/> Information Disclosure Statement (IDS)/PTO-1449 <input type="checkbox"/> Copies of IDS Citations 11. <input type="checkbox"/> Preliminary Amendment 12. <input checked="" type="checkbox"/> Return Receipt Postcard (MPEP 503) <i>(Should be specifically itemized)</i> 13. <input type="checkbox"/> * Small Entity Statement(s) <input type="checkbox"/> Statement filed in prior application, Status still proper and desired (PTO/SB/09-12) 14. <input type="checkbox"/> Certified Copy of Priority Document(s) (if foreign priority is claimed) 15. <input type="checkbox"/> Other:	
* NOTE FOR ITEMS 1 & 13: IN ORDER TO BE ENTITLED TO PAY SMALL ENTITY FEES, A SMALL ENTITY STATEMENT IS REQUIRED (37 C.F.R. § 1.27), EXCEPT IF ONE FILED IN A PRIOR APPLICATION IS RELIED UPON (37 C.F.R. § 1.28).	

16. If a CONTINUING APPLICATION, check appropriate box, and supply the requisite information below and in a preliminary amendment:
☐ Continuation ☐ Divisional ☐ Continuation-in-part (CIP) of prior application No: _____
 Prior application information: Examiner _____ Group / Art Unit: _____

For CONTINUATION or DIVISIONAL APPS only: The entire disclosure of the prior application, from which an oath or declaration is supplied under Box 4b, is considered a part of the disclosure of the accompanying continuation or divisional application and is hereby incorporated by reference. The incorporation can only be relied upon when a portion has been inadvertently omitted from the submitted application parts.

17. CORRESPONDENCE ADDRESS <input type="checkbox"/> Customer Number or Bar Code Label _____ or <input type="checkbox"/> Correspondence address below <i>(Insert Customer No. or Attach bar code label here)</i>					
Name	Satheesh K. Karra, Reg. No. 40,246, Agent for Applicant MCI WORLDCOM, Inc.				
Address	1133 19th Street, N.W.				
City	Washington	State	D.C.	Zip Code	20036
Country	USA	Telephone		Fax	

Name (Print/Type)	Satheesh K. Karra	Registration No. (Attorney/Agent)	40,246
Signature	<i>S. Satheesh Kumar</i>	Date	6/10/99

Burden Hour Statement: This form is estimated to take 0.2 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Assistant Commissioner for Patents, Box Patent Application, Washington, DC 20231.

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

APPLICATION FOR LETTERS PATENT

* * * * *

**NETWORK APPARATUSES, NETWORKS,
COMPUTER PROGRAM PRODUCTS, AND
MANAGEMENT STATION OPERATIONAL
METHODS**

* * * * *

INVENTORS

**David Liu
David Bennett**

DOCKET NO. CAR-99-006

1 NETWORK APPARATUSES, NETWORKS,
2 COMPUTER PROGRAM PRODUCTS, AND
3 MANAGEMENT STATION OPERATIONAL METHODS

4 TECHNICAL FIELD

5 The present invention relates to network apparatuses, networks,
6 computer program products, and management station operational
7 methods.

8
9 BACKGROUND OF THE INVENTION

10 Computer networks are utilized in an ever-increasing number of
11 applications to provide interconnection of numerous computer systems.
12 Exemplary networks may be implemented as local area networks (LANs)
13 and wide area networks (WANs). Networks are growing larger in size
14 and more complex in nature in many applications.

15 Networks typically include a communication infrastructure of
16 hundreds or thousands of devices such as routers, switches, hubs,
17 concentrators, etc. Such communication infrastructures often comprise
18 heterogeneous networks which individually include devices from numerous
19 vendors which implement various technologies. The utilization of devices
20 from numerous vendors may be advantageous for performance reasons
21 and cost-effectiveness.

22 Management stations are provided in some conventional network
23 configurations. Management stations are provided to manage and keep
24 track of devices of the communication infrastructures. For example,

1 management stations can be configured to obtain information of such
2 devices as they enter and/or leave the associated network.

3 A management interface or management information base (MIB)
4 supported by individual network devices is normally determined by the
5 model, system software version and/or the manufacturer of the device.
6 In many instances, the management interface or the management
7 information base is particular to the individual device. For proper
8 management of multi-vendor heterogeneous networks, it is often desired
9 to determine the vendor, model and/or version of the individual network
10 devices within the network being managed. Thereafter, the management
11 station can apply a specific set of management commands (or MIBs) to
12 manage the device.

13 In some conventional network configurations, such numerous
14 network devices are logged by manual entry. Maintaining a data base
15 of all network devices in a current updated condition requires a
16 considerable amount of time and effort. For example, existing devices
17 may experience hardware updates during implementation within the
18 associated network. Furthermore, new devices may be added to the
19 network and existing devices may be removed from the network at a
20 given time. Maintaining an accurate and updated list of network
21 devices is increasingly difficult and time-consuming in large existing
22 networks which may include thousands of individual network devices.
23 Manual updating of such data bases is susceptible to human error as
24 well as other inaccuracies.

1 Therefore, a need exists in the art to provide improved structure
2 and methodologies for analyzing and/or managing network systems.
3

4 SUMMARY OF THE INVENTION

5 The present invention provides network apparatuses, networks,
6 computer program products, and management station operational
7 methods. According to a first aspect, a network apparatus comprises:
8 a management station adapted to couple with a network including a
9 plurality of managed devices, the management station being configured
10 to output a plurality of initial commands for application to respective
11 managed devices, the initial commands being configured to stimulate
12 initial responses from the managed devices, the management station
13 being further configured to receive the initial responses, to identify
14 responding ones of the managed devices responsive to the received
15 initial responses, and to provide an asset table containing the identified
16 managed devices.

17 Another aspect of the invention provides a network comprising:
18 a plurality of managed devices configured to communicate signals; and
19 a management station configured to output a plurality of initial
20 commands to respective managed devices, the initial commands being
21 configured to stimulate initial responses from the managed devices, the
22 management station being further configured to receive the initial
23 responses, to identify responding ones of the managed devices responsive
24

1 to the received initial responses, and to provide an asset table
2 containing the identified managed devices.

3 According to another aspect, the present invention provides a
4 computer program product comprising: computer usable program code
5 configured to cause a management station to communicate a plurality
6 of initial commands to a plurality of managed devices of a network;
7 computer usable program code configured to cause the management
8 station to receive a plurality of initial responses from the managed
9 devices; computer usable program code configured to cause the
10 management station to identify responding ones of the managed devices;
11 and computer usable program code configured to cause the management
12 station to provide the identified ones of managed devices in an asset
13 table.

14 Yet another aspect of the invention provides a management
15 station operational method comprising: providing a network comprising
16 a plurality of managed devices; outputting a plurality of initial
17 commands to the managed devices using a management station to
18 stimulate initial responses from the managed devices; receiving the initial
19 responses from the managed devices using the management station; and
20 identifying the managed devices using the management station responsive
21 to the receiving the initial responses.

BRIEF DESCRIPTION OF THE DRAWINGS

Preferred embodiments of the invention are described below with reference to the following accompanying drawings.

Fig. 1 is an illustrative representation of a managed service network and a management station.

Fig. 2 is an illustrative representation of an exemplary frame for communications.

Fig. 3 is a functional block diagram of an exemplary configuration of the management station shown in Fig. 1.

Fig. 4 is a flow chart illustrating exemplary identification operations of the management station.

Fig. 5 is a state diagram corresponding to the identification operations of Fig. 4.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

Referring to Fig. 1, a managed service network 10 is illustrated. The depicted network 10 can comprise a local area network (LAN), wide area network (WAN) or other network configuration. Network 10 includes a plurality of managed devices 12 which form the communications infrastructure of managed service network 10. More or less numbers of managed devices 12 may be provided within network 10. Exemplary managed devices 12 include switches, routers, hubs, etc. configured to electrically communicate signals, such as data packets in the described embodiment. Managed devices 12 can be

1 coupled with associated stations (not shown) such as personal computers,
2 word processors, etc. Network 10 operates to connect such stations
3 utilizing the communications infrastructure comprising managed
4 devices 12.

5 In the described embodiment, network 10 comprises a multi-vendor
6 heterogeneous network. More specifically, managed devices 12 are or
7 may be provided from more than one vendor and individual managed
8 devices 12 can have various models and versions in the described
9 embodiment.

10 Management station 14 is configured as a network apparatus in
11 the described embodiment to analyze and manage network 10. In
12 particular, management station 14 is operable to monitor the presence
13 and device type (e.g., vendor, model, version, etc.) of individual
14 managed devices 12.

15 Managed devices 12 support respective management interfaces or
16 management information bases (MIBs). The particular management
17 interface or management information base supported by one of managed
18 devices 12 is normally determined by the model, system software version
19 and/or the manufacturer of the respective managed device 12.
20 Accordingly, it is beneficial to identify and update as necessary the
21 device types of managed devices 12. Once the device types of managed
22 devices 12 are identified, management station 14 can apply specific sets
23 of management commands (or MIBs) which correspond to the identified
24 device types to manage the respective devices 12.

1 Management station 14 and managed devices 12 of network 10 are
2 individually configured to execute a management program in accordance
3 with the described embodiment. For example, management station 14
4 and individual managed devices 12 can execute a Simple Network
5 Management Protocol (SNMP) management program. Exemplary network
6 management operations are described in Douglas E. Comer, *Computer*
7 *Networks and Internets* (2d ed. 1999), incorporated herein by reference.

8 In a Simple Network Management Protocol application,
9 management station 14 is referred to as a manager and individual
10 managed devices 12 are referred to as agents. Management station 14
11 and individual managed devices 12 are configured to communicate with
12 one another using any appropriate transport protocol, such as
13 Transmission Control Protocol/Internet Protocol (TCP/IP) communications.

14 Referring to Fig. 2, an exemplary frame 20 for implementing
15 packet-switched communications between management station 14 and
16 managed devices 12 is shown. The depicted frame 20 is configured as
17 an Ethernet frame. The depicted frame 20 illustrates communications
18 according to one exemplary network communication protocol. Other
19 frame constructions or formats may be utilized in other network
20 communication configurations.

21 The depicted frame 20 includes a preamble field 22, destination
22 address field 24, source address field 26, network-type field 28, IP
23 and TCP header field 30, data field 32 and frame check sequence
24 field 34. Management station 14 manages the associated network 10

1 and utilizes frames 20 to exchange information with individual managed
2 devices 12. Similarly, individual managed devices 12 may utilize
3 frames 20 to communicate with management station 14. For
4 example, SNMP requests, SNMP responses and SNMP traps may be
5 encoded in the IP and TCP header field 30 of frame 20. Exemplary
6 communication exchanges intermediate management station 14 and
7 managed devices 12 are described below.

8 Referring to Fig. 3, one exemplary configuration of management
9 station 14 is shown. The depicted management station 14 comprises a
10 processor 40, memory 42, hard-disk drive 44 and associated
11 peripherals 46. Processor 40, memory 42, hard-disk drive 44 and
12 peripherals 46 are coupled with a system bus 48.

13 Hard-disk drive 44 can be configured to store computer usable
14 program code which may be executed by processor 40. Additionally,
15 peripherals 46 can include another disk drive configured to receive
16 computer usable program code provided upon floppy disks. Other
17 suitable devices and/or methodologies may be utilized to supply
18 computer usable program code to processor 40 for execution.

19 A printer 49 is coupled with system bus 48. Printer 49 may be
20 utilized to output an asset table generated as described below or other
21 operations of management station 14. Such an asset table includes
22 polled nodes and respective device types associated with such nodes for
23 a given managed service network 10. System bus 48 is further coupled
24

1 with managed service network 10 of Fig. 1. A network interface card
2 (not shown) may be utilized for such coupling.

3 In one exemplary embodiment, hard-disk drive 44 includes a
4 management program, such as the Simple Network Management Protocol
5 management program, to provide management of managed devices 12 of
6 network 10. Management station 14 configured in accordance with the
7 present invention is operable to identify individual managed devices 12
8 of managed service network 10. Management station 14 communicates
9 with network 10 using frames 20 and system bus 48 to implement
10 identification operations.

11 A node table (not shown) corresponding to individual managed
12 devices 12 of the associated network 10 being managed is provided to
13 management station 14. The node table lists addresses for individual
14 associated managed devices 12 corresponding to respective nodes.
15 Exemplary addresses include Internet Protocol addresses.

16 Individual node tables correspond to respective networks.
17 Management station 14 utilizes the node tables to poll managed
18 devices 12 within the associated network 10. Management station 14
19 implements such polling operations in an attempt to identify managed
20 devices 12 of network 10.

21 Referring to Fig. 4, a flow chart illustrates one process for polling
22 individual managed devices 12 of network 10. The depicted flow chart
23 is implemented for individual managed devices 12 which are desired to
24 be identified. The illustrated flow chart is implemented as computer

1 usable program code stored within hard-disk drive 44 in an exemplary
2 embodiment. Processor 40 is configured to access and execute such
3 program code to identify managed devices 12. Other implementations
4 of the described process are possible.

5 Initially, at step S10, management station processor 40 selects a
6 managed device 12 of network 10 to be analyzed. The selected
7 managed device 12 is provided within the node table of the associated
8 network 10 in the described embodiment. In one configuration,
9 processor 40 sequentially proceeds through the node table to analyze
10 individual managed devices 12.

11 Following the selection of one managed device 12 of network 10
12 at step S10, processor 40 proceeds to step S12 and applies an
13 appropriate initial command to the selected managed device 12 using an
14 address for the device from the node table. As described further
15 below, the command is ideally chosen in the described embodiment to
16 stimulate a response from the polled managed device 12. More
17 specifically, the command is ideally chosen to stimulate a response which
18 uniquely identifies the currently polled managed device 12.

19 At step S14, processor 40 determines whether a response from the
20 polled managed device 12 was received responsive to the initial
21 command. If not (e.g., the response fails), processor 40 proceeds to
22 step S16 to determine whether more commands are available for
23 application to the currently polled managed device 12. Such may be
24 necessary if the currently polled managed device 12 does not support

1 the initial command. If at least one new command is available,
2 processor 40 applies such subsequent command at step S18 to the
3 managed device 12. Thereafter, processor 40 again awaits a response
4 at step S14.

5 If no more commands are available at step S16, processor 40
6 ends the interrogation or polling of the current managed device 12.
7 Thereafter, a manager or operator may attempt to manually ascertain
8 the identification of the previously polled managed device 12.

9 Alternatively, if a response is received at step S14 responsive to
10 an applied initial or subsequent command, processor 40 compares the
11 command and received response with device type data within a device
12 table or device knowledge data base in an attempt to match the
13 command and response with a device type at step S17. An exemplary
14 device table or device knowledge data base is illustrated below as
15 Table B. Such includes descriptive information associated with each
16 device type. For example, entries exist for individual device types which
17 specify the associated SNMP sysObjectID value, the vendor
18 manufacturing the device, the model of the device, and the hardware
19 category (e.g., router or switch) of the device.

20 Such matching can either directly indicate the device type of the
21 currently polled managed device 12 or provide an indication that further
22 polling is required to accurately and completely identify the currently
23 polled managed device 12.
24

1 More specifically, it is determined whether a unique device was
2 determined from the matching of the command and the response with
3 the device knowledge data base at step S18. If the responding
4 managed device 12 can be identified as a unique device, processor 40
5 proceeds to step S20 to add the currently polled managed device 12 to
6 an asset table (not shown). The asset table captures the results from
7 the polling of managed devices 12. The asset table includes the device
8 types of managed devices 12 and the associated nodes of network 10.
9 The asset table provides a summary of the managed network.

10 If the response received at step S14 fails to identify a unique
11 device at step S18, processor 40 proceeds to step S22 to determine
12 whether more commands are available to poll the current managed
13 device 12. Processor 40 ends the interrogation of the current managed
14 device 12 if no more commands are available. The manager or
15 operator may thereafter manually attempt to determine the identification
16 of the managed device 12. Once determined, the device type may be
17 provided within the asset table and associated with the proper node.
18 The device type and signature (e.g., command and corresponding
19 response) can also be provided within a state transition table (described
20 below) and the device table or device knowledge data base for future
21 comparison of subsequently analyzed managed devices 12.

22 Alternatively, if more commands are available for interrogation as
23 determined at step S22, processor 40 proceeds to step S24 to apply a
24 new subsequent command to the currently polled managed device 12.

1 Next, processor 40 proceeds to step S26 to monitor for the reception
2 of a response from the polled managed device 12. If no response is
3 received at step S26, processor 40 proceeds to step S22. If a response
4 is received at step S26, processor 40 proceeds to step S17 in an
5 attempt to match the received response and associated command with
6 an entry of the device table as described above. Thereafter,
7 processor 40 proceeds to step S18 to determine whether any matching
8 resulted in the identification of a unique device type for the currently
9 polled managed device 12 as previously described.

10 Following completion of the flow chart for the currently polled
11 managed device, processor 40 of management station 14 proceeds to the
12 next node and corresponding address and performs the flow chart again
13 to attempt to determine the device type of the next associated managed
14 device 12. Such can occur until all nodes and associated managed
15 devices are analyzed.

16 Management station 14 can manage devices 12 following
17 identification operations. For example, hard-disk drive 44 can
18 additionally include computer usable program code configured to cause
19 management station 14 to apply one or more management commands
20 to identified managed devices 12. Such applied management commands
21 individually correspond to the identified device types of managed
22 devices 12.

23 The flow chart steps of Fig. 4 are implemented within
24 processor 40 of management station 14 comprising a finite state machine

in one exemplary configuration. An example of a state transition table for discovering a device type for a currently polled managed device 12 is shown below in Table A. The "%" character represents a wild card pattern which matches any number of characters in the described example.

TABLE A

State ID	Command	Response	Next Action
1	snmpget system.sysObjectID.0	like '%.cisco.%'	Lookup
2	snmpget system.sysObjectID.0	like '%.wellfleet.%'	Goto 10
3	snmpget system.sysObjectID.0	like '%.3Com.%'	Lookup
...	snmpget system.sysObjectID.0	<failed>	Goto 21
10	snmpget wfSwSeries7.wfHardwareConfig.wfH2Base.wfHwBpldOpt.0	like '[0-9]+'	Lookup
...			
21	snmpget sunSystem.agentDescr.0	like '%SPARC%'	Lookup
...			

Table A includes state identifications, commands, responses and next actions in respective columns as illustrated. The command values indicated in the second column correspond to selected commands within management station 14 for application to a currently polled managed device 12. Such commands may be considered as triggers within a finite state machine.

1 The finite state machine begins with state 1 for individual
2 managed devices 12 being analyzed. The commands are selected with
3 the aim of triggering or stimulating responses from the managed
4 devices 12 which uniquely identify the responding managed devices 12.
5 For example, the "snmpget system.sysObjectID.0" command indicated in
6 state 1 triggers a unique response in numerous device types which may
- be implemented within the communication infrastructure of network 10.

8 Table A also indicates responses or identifiers in the third column
9 which correspond to the appropriate command. The command and
10 associated response provide a signature for the currently polled managed
11 device 12. Based upon the command and response, a next state in the
12 finite state machine is determined.

13 The polling of an exemplary managed device 12 is described next.
14 Initially, management station 14 outputs the command indicated in the
15 first row of Table A corresponding to the first state. If a response
16 from the currently polled managed device 12 includes the character
17 string "%.cisco.%", processor 40 performs a Lookup function as indicated
18 in the fourth column of Table A.

19 The signature (i.e., command and response) of a currently polled
20 managed device 12 corresponding to the first row indicates a Lookup
21 function is appropriate in an attempt to determine the device type of
22 the managed device 12. More specifically, following a signature of the
23 command and response of the first state identification for a currently
24 polled managed device 12, processor 40 utilizes a device table in an

attempt to derive a device type for the currently polled managed device 12.

An exemplary device table or device knowledge data base is illustrated below as Table B.

TABLE B

Device Index	Command	Response	Vendor	Model
cisco4500	snmpget system.sysObjectID.0	.iso.org.dod.internet .private.enterprises. cisco.products.14	Cisco Systems, Inc.	4500
cisco4500	snmpget system.sysObjectID.0	.iso.org.dod.internet .private.enterprises. cisco.products.8	Cisco Systems, Inc.	7000
...				
3com	snmpget system.sysObjectID.0	.920.org.dod.internet .private.enterprises. 13Com.products.bro uter.11	3Com Corp.	nb2_4
3com	snmpget system.sysObjectID.0	.iso.org.dod.internet .private.enterprises. a3Com.products.bro uter.13	3Com Corp.	nbro
...				
wellfleet_AC ECN	snmpget wfSwSeries7.wfHard wareConfig.wfHwBas e.wfHwBpldOpt.0	1	Bay Networks Inc.	ACECN switch
...				
sunSparc	snmpget sunSystem.agentDescr .0	Sun SNMP Agent, SUNW,SPARCstati on-20	Sun Micro- systems Inc.	Sparc
...				

1 Using the signature corresponding to the first state identification,
2 processor 40 can ascertain that the currently polled managed device 12
3 is a Cisco 4500 or Cisco 7000 from the depicted device table.
4 Processor 40 utilizes the response to ascertain the appropriate device
5 type of the device table. For example, the Cisco 4500 and Cisco 7000
6 are possible device types for the currently polled managed device 12
7 inasmuch as the received response includes the "%.cisco.%" string.

8 Further, the response typically includes further information which
9 identifies the particular one of the two indicated Cisco device
10 possibilities. In other words, processor 40 initially searches for the
11 "%.cisco.%" string to determine that a Lookup is appropriate.
12 Thereafter, processor 40 utilizes the entire response to identify the
13 particular device type. For example, an exemplary entire response to
14 a command being ".iso.org.dod.internet.private.enterprises.cisco.products.8"
15 would indicate that the currently polled managed device 12 has a device
16 type of Cisco 7000. The asset table is thereafter updated by
17 processor 40 to include the identified device type for the currently
18 polled managed device 12.

19 Obtaining a signature (i.e., initial command and initial response)
20 corresponding to the second state identification of Table A, processor 40
21 proceeds to state identification 10 of the Table A and issues a
22 subsequent command for application to a currently polled managed
23 device 12. The signature of identification state 2 indicates a group of
24 device types without specifically identifying the exact model and

1 manufacturer (i.e., no unique device is determined from the initial
2 signature). Accordingly, processor 40 proceeds to state identification 10
3 in search of such information and issues the subsequent indicated
4 command to the currently polled managed device 12.

5 Following the receipt of a response such as "[0-9]+" following the
6 issuance of the subsequent command of state identification 10,
7 processor 40 again proceeds to the device table of Table B to identify
8 the currently polled device 12 as an ACECN switch available from Bay
9 Networks, Inc. The asset table is thereafter updated by processor 40
10 to include the identified device type for the currently polled managed
11 device 12.

12 Referring to the fourth state identification of Table A, a "failed"
13 response is indicated responsive to the associated initial command. Such
14 may indicate that the particular device type currently being polled does
15 not support the command. In such a situation, processor 40 proceeds
16 to state identification 21 to issue the indicated command. Thereafter,
17 following reception of a "%SPARC%" string, processor 40 can perform
18 a Lookup function of the device table to determine the device type of
19 the currently polled managed device 12. Such would indicate a Sparc
20 model available from Sun Microsystems, Inc. Accordingly, the associated
21 asset table is updated by processor 40 to include the device type of the
22 currently polled managed device 12.

23 Referring to Fig. 5, a state diagram for the illustrated exemplary
24 identification operations is shown. The depicted state diagram

1 corresponds to the state transition table of Table A and the device
2 table of Table B. A first, second or third vendor is ideally identified
3 following the response to an issued command from the first state
4 identification. Vendor No. 1 can correspond to Cisco Systems, Inc. and
5 Vendor No. 2 can correspond to 3Com Corp. for consistency with the
6 above tables.

7 Identification of Vendor No. 3 (e.g., Bay Networks, Inc.) following
8 the initial state causes the issuance of a subsequent command from
9 state identification 10 to determine whether the device is a switch or
10 router of the indicated vendor.

11 The indicated state 21 is entered following the receipt of a failed
12 indication responsive to the initial command. Such can lead to the
13 identification of the appropriate Vendor No. 4 (e.g., Sun Microsystems,
14 Inc.) or, alternatively, no identification of the currently polled managed
15 device 12. A manger or operator may attempt to manually determine
16 the device type of the currently polled managed device 12 if no
17 identification is ascertained by the finite state machine. Such manually
18 determined device type may be added to the device table or device
19 knowledge data base and the asset table.

20 The protection sought is not to be limited to the disclosed
21 embodiments, which are given by way of example only, but instead is
22 to be limited only by the scope of the appended claims as properly
23 interpreted in accordance with the doctrine of equivalents.

1 **CLAIMS:**

2 1. A network apparatus comprising:

3 a management station adapted to couple with a network including
4 a plurality of managed devices, the management station being configured
5 to output a plurality of initial commands for application to respective
6 managed devices, the initial commands being configured to stimulate
7 initial responses from the managed devices, the management station
8 being further configured to receive the initial responses, to identify
9 responding ones of the managed devices responsive to the received
10 initial responses, and to provide an asset table containing the identified
11 managed devices.

12
13 2. The apparatus according to claim 1 wherein the management
14 station is configured to execute a Simple Network Management Protocol
15 management program.

16
17 3. The apparatus according to claim 1 wherein the management
18 station is configured to communicate with the managed devices using
19 Transmission Control Protocol/Internet Protocol communications.
20
21
22
23
24

1 4. The apparatus according to claim 1 wherein the management
2 station is configured to select a plurality of subsequent commands
3 responsive to the received initial responses and the subsequent
4 commands are configured to stimulate subsequent responses from
5 respective managed devices, to output the subsequent commands for
6 application to respective managed devices, to receive the subsequent
7 responses, to identify responding ones of the managed devices responsive
8 to the received subsequent responses, and to provide the subsequently
9 identified managed devices within the asset table.

10
11 5. The apparatus according to claim 4 wherein the received
12 initial responses comprise failed responses.

13
14 6. The apparatus according to claim 1 wherein the management
15 station is configured to compare individual received initial responses with
16 a device table to identify the device types of responding ones of the
17 managed devices.

18
19 7. The apparatus according to claim 6 wherein the management
20 station is configured to apply management commands to respective
21 identified managed devices, the applied management commands
22 individually correspond to respective device types of the identified
23 managed devices.

1 8. A network comprising:
2 a plurality of managed devices configured to communicate signals;
3 and
4 a management station configured to output a plurality of initial
5 commands to respective managed devices, the initial commands being
6 configured to stimulate initial responses from the managed devices, the
7 management station being further configured to receive the initial
8 responses, to identify responding ones of the managed devices responsive
9 to the received initial responses, and to provide an asset table
10 containing the identified managed devices.

11
12 9. The network according to claim 8 wherein the management
13 station and the managed devices are individually configured to execute
14 a Simple Network Management Protocol management program.

15
16 10. The network according to claim 8 wherein the management
17 station is configured to communicate with the managed devices using
18 Transmission Control Protocol/Internet Protocol communications.

1 11. The network according to claim 8 wherein the management
2 station is configured to select a plurality of subsequent commands
3 responsive to the received initial responses and the subsequent
4 commands are configured to stimulate subsequent responses from
5 respective managed devices, to output the subsequent commands for
6 application to respective managed devices, to receive the subsequent
7 responses, to identify responding ones of the managed devices responsive
8 to the received subsequent responses, and to provide the subsequently
9 identified managed devices within the asset table.

10
11 12. The network according to claim 11 wherein the received
12 initial responses comprise failed responses.

13
14 13. The network according to claim 8 wherein the management
15 station is configured to compare the received initial responses with a
16 device table to identify the device types of responding ones of the
17 managed devices.

18
19 14. The network according to claim 13 wherein the management
20 station is configured to apply management commands to respective
21 identified managed devices, the applied management commands
22 individually correspond to respective device types of the identified
23 managed devices.

1 15. A computer program product comprising:
2 computer usable program code configured to cause a management
3 station to communicate a plurality of initial commands to a plurality of
4 managed devices of a network;
5 computer usable program code configured to cause the
6 management station to receive a plurality of initial responses from the
7 managed devices;
8 computer usable program code configured to cause the
9 management station to identify responding ones of the managed devices;
10 and
11 computer usable program code configured to cause the
12 management station to provide the identified ones of managed devices
13 in an asset table.
14
15 16. The product according to claim 15 further comprising
16 computer usable data comprising a device table corresponding to the
17 managed devices.
18
19
20
21
22
23
24

1 17. The product according to claim 15 further comprising
2 computer usable program code configured to cause the management
3 station to select a plurality of subsequent commands responsive to the
4 received initial responses and the subsequent commands are configured
5 to stimulate subsequent responses from respective managed devices, to
6 output the subsequent commands for application to respective managed
7 devices, to receive the subsequent responses, to identify responding ones
8 of the managed devices responsive to the received subsequent responses,
9 and to provide the subsequently identified managed devices within the
10 asset table.

11
12 18. The product according to claim 17 wherein the received
13 initial responses comprise failed responses.

14
15 19. The product according to claim 15 further comprising:
16 computer usable data including a state transition table including
17 a plurality of identifiers; and

18 computer usable program code configured to cause the
19 management station to compare the received initial responses with the
20 identifiers to identify the device types of the respective responding
21 managed devices.
22
23
24

1 20. The product according to claim 15 further comprising
2 computer usable program code configured to cause the management
3 station to apply a plurality of management commands to respective
4 identified managed devices, the applied management commands
5 individually correspond to respective device types of the identified
6 managed devices.

7
8 21. The product according to claim 15 further comprising
9 computer usable data including a node table comprising a plurality of
10 node locations for respective managed devices.

11
12 22. A management station operational method comprising:
13 providing a network comprising a plurality of managed devices;
14 outputting a plurality of initial commands to the managed devices
15 using a management station to stimulate initial responses from the
16 managed devices;

17 receiving the initial responses from the managed devices using the
18 management station; and

19 identifying the managed devices using the management station
20 responsive to the receiving the initial responses.

21
22 23. The method according to claim 22 further comprising
23 providing identified managed devices within an asset table.

1 24. The method according to claim 22 further comprising
2 executing Simple Network Management Protocol management programs
3 using the managed devices and the management station.

4
5 25. The method according to claim 22 wherein the outputting
6 and receiving individually comprise outputting and receiving using
7 Transmission Control Protocol/Internet Protocol communications.

8
9 26. The method according to claim 22 further comprising:
10 selecting a plurality of subsequent commands responsive to the
11 receiving the initial responses;

12 outputting the subsequent commands to the managed devices;
13 receiving a plurality of subsequent responses from the managed
14 devices using the management station following the outputting the
15 subsequent commands;

16 identifying the managed devices communicating the subsequent
17 responses using the management station responsive to the receiving the
18 subsequent responses; and

19 providing the subsequently identified managed devices within an
20 asset table.

21
22 27. The method according to claim 26 wherein the selecting
23 subsequent commands is responsive to the receiving the initial responses
24 comprising failed responses.

1 28. The method according to claim 22 wherein the identifying
2 comprises comparing the received initial responses with a device table
3 to identify the device types of responding ones of the managed devices.
4

5 29. The method according to claim 28 further comprising
6 updating the device table after the receiving.
7







8 30. The method according to claim 22 wherein the identifying
9 comprises identifying the device types of the managed devices, and
10 further comprising applying a plurality of management commands to the
11 identified managed devices individually corresponding to respective device
12 types of the identified managed devices.
13
14
15
16
17
18
19
20
21
22
23
24


1 ABSTRACT OF THE DISCLOSURE


2 Network apparatuses, networks, computer program products, and
3 management station operational methods are provided. One aspect of
4 the invention provides a network apparatus including a management
5 station adapted to couple with a network including a plurality of
6 managed devices, the management station being configured to output a
7 plurality of initial commands for application to respective managed
8 devices, the initial commands being configured to stimulate initial
9 responses from the managed devices, the management station being
10 further configured to receive the initial responses, to identify responding
11 ones of the managed devices responsive to the received initial responses,
12 and to provide an asset table containing the identified managed devices.
13 Another aspect provides a management station operational method
14 including providing a network comprising a plurality of managed devices;
15 outputting a plurality of initial commands to the managed devices using
16 a management station to stimulate initial responses from the managed
17 devices; receiving the initial responses from the managed devices using
18 the management station; and identifying the managed devices using the
19 management station responsive to the receiving the initial responses.

20
21
22
23
24

1/3

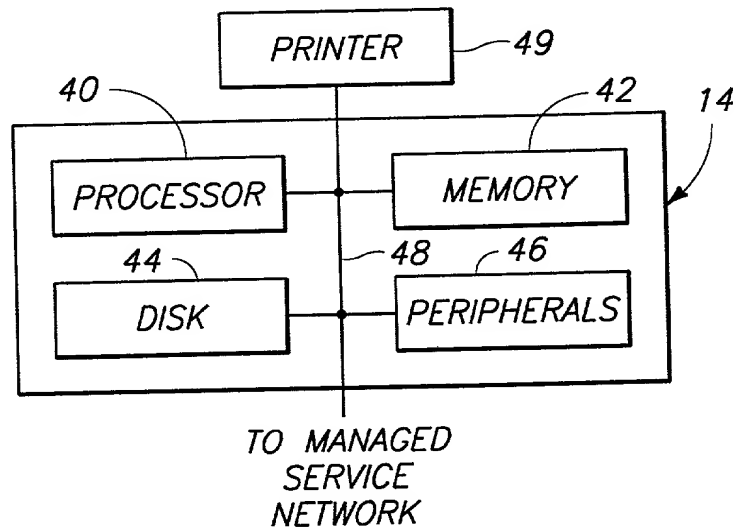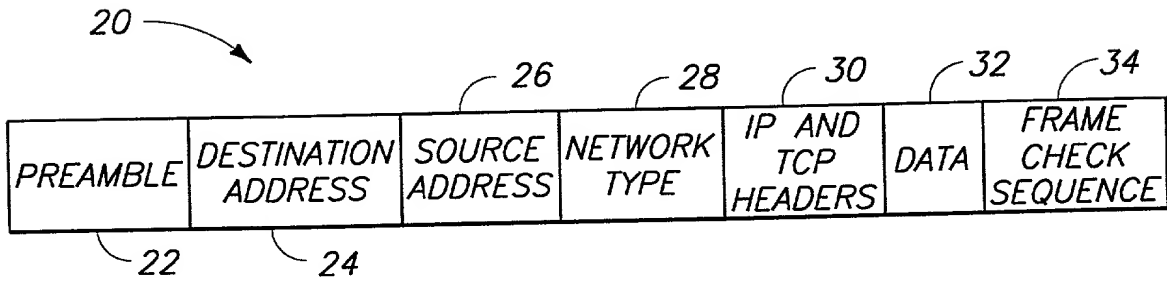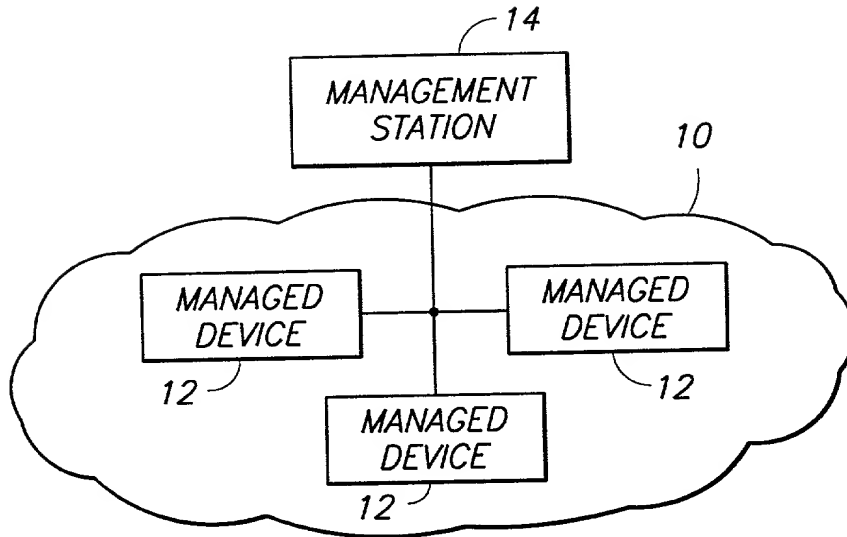

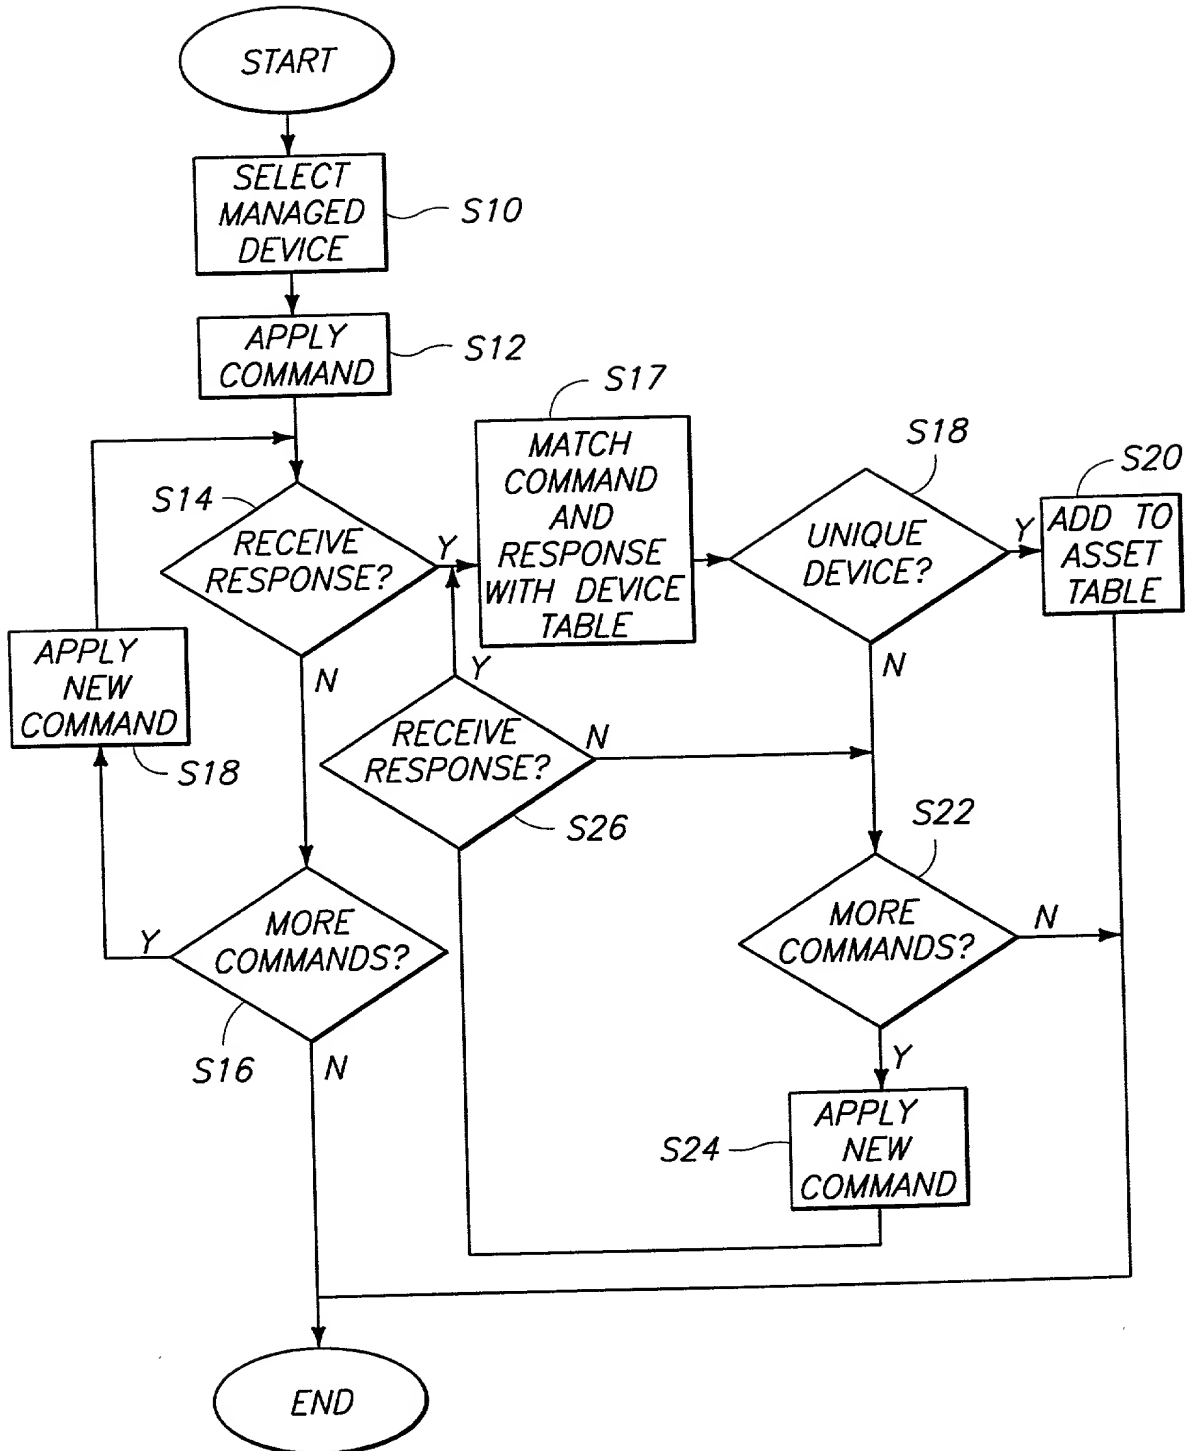

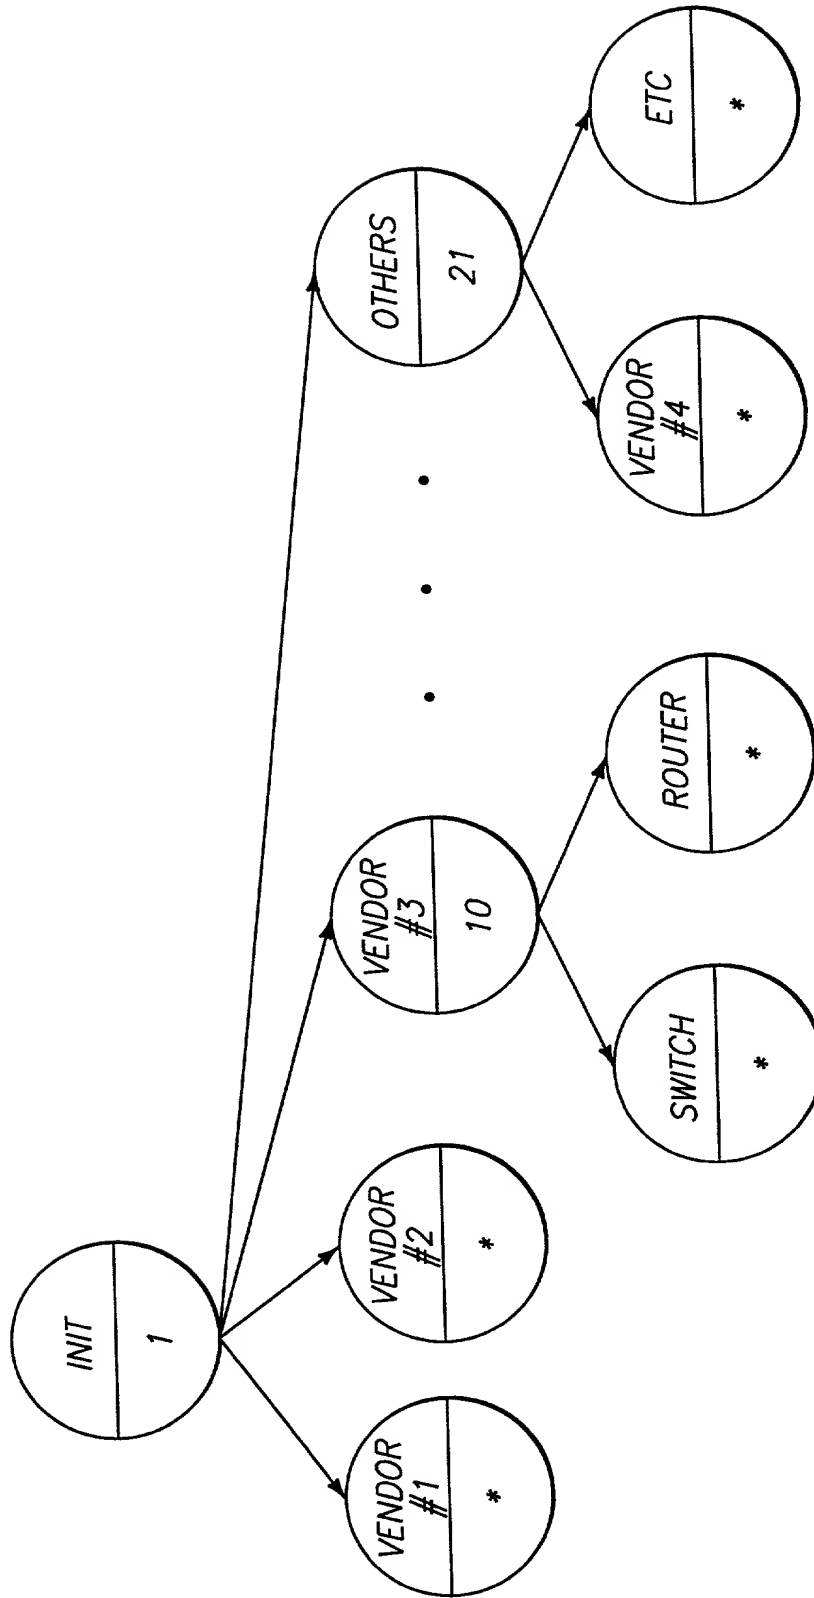

ITIL

DECLARATION AND POWER OF ATTORNEY FOR UTILITY PATENT APPLICATION

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below, next to my name,

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

*Network Apparatuses, Networks, Computer Program Products, and Management
Station Operational Methods*

the specification of which

☒ is attached hereto.

☐ was filed on

as Application Serial No.
amended on

and was

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above. I do not know and do not believe that the same was ever known or used in the United States of America before my invention thereof, or patented or described in any printed publication in any country before my invention thereof of more than one year prior to this application, and said invention has not been patented or made the subject of an inventor's certificate issued before the date of this application in any country foreign to the United States of America on an application filed by me or my legal representatives or assigns more than twelve months prior to this application.

I acknowledge the duty to disclose information which is material to the patentability of this application in accordance with Title 37, Code of Federal Regulations, Section 1.56(a).

I hereby claim the benefit under Title 35, United States Code, Section 119, of any foreign application(s) for patent or inventor's certificate listed below and also identified below any foreign application for patent or inventor's certificate having filing date before that of the application on which priority is claimed:

Prior Foreign Application(s)

Priority Claimed

(Number)	(Country)	(Date Filed)	Yes	No
_____	_____	_____	_____	_____
(Number)	(Country)	(Date Filed)	Yes	No
_____	_____	_____	_____	_____

I hereby claim the benefit under Title 35, United States Code, Section 120 of any United States application(s) listed below, and insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, Section 112, I acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations, Section 1.56(s) which occurred between the filing date of the prior application and the national or PCT international filing date of this application:

(Application Serial No.)	(Filing Date)	(Status)
(Application Serial No.)	(Filing Date)	(Status)

I hereby appoint Timothy D. Casey, Reg. No. 33,124; Albert M. Crowder, Jr., Reg. No. 28,063; Jubin Dana, Reg. No. 41,400; Jacob M. Eisenberg, Reg. No. 43,410; Carl Evens, Reg. No. 33,874; Deborah Miller, Reg. No. 37,679; Stephen J. Pentlicki, Reg. No. 40,125; Craig L. Plastrik, Reg. No. 41,254; Paul A. Roberts, Reg. No. 40,289 and Jessica W. Young, Reg. No. 39,884 as my attorneys Sathesh Karra, Reg. No. 40,246 my patent agent with full power of substitution and revocation, to prosecute this application and to transact all business in the Patent and Trademark Office.

Send correspondence to:
Technology Department
MCI WORLD COM, Inc.
1133 19TH STREET NW
WASHINGTON DC 20036

Direct Telephone Calls To:

202-736-6123
Sathesh Karra

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Full Name of Sole or First Inventor:	David Liu		
P.O./Residence Address:	4301 Hickory Ridge Drive, Raleigh, North Carolina 27609		
Citizenship:	Signature: <u>David Liu</u>	Date:	6/10/1999
USA			

Full Name of Second Joint Inventor:	David C. Bennett		
P.O./Residence Address:	8436 Wyndridge Drive, Apex, North Carolina 27502		
Citizenship:	Signature: <u>David C. Bennett</u>	Date:	6/10/1999
USA			